

Bamboo Scaffolder Skilled Trade Test Mock Practical Test Paper

Disclaimer

No part of this material may be reproduced or transmitted in any form or any means without the written permission of the CIC. Whilst reasonable efforts have been made to ensure the accuracy of the information contained in this material, the CIC nevertheless would encourage readers to seek appropriate independent advice from their professional advisers where possible and readers should not treat or rely on this material as a substitute for such professional advice for taking any relevant actions.

Enquiries

Enquiries on this Material may be made to the Trade Test Centre at:

95, Yue Kwong Road Aberdeen Hong Kong

Tel: (852) 2100 9232 Fax: (852) 2100 9249

Email: enquiry@hkcic.org

Website: www.hkcic.org

© 2015 Construction Industry Council.

Trade Test Paper

Trade : Bamboo Scaffolding

Grade : Craftsman

Test Contents : Complete the following items at designated location : -

<u>Items</u> <u>Score</u>

- Dismantle a bamboo scaffolding and 25 associated structures (approximately 3.8 M x 4.6 M) in a safe manner (to ensure the stability of the scaffolding at all times) as follows:
 - (i) Inspect / repair as necessary before dismantling work.
 - (ii) Dismantle the scaffolding.
 - (iii) Stack up property the dismantled materials.
 - (iv) Tidy up job site.
- Erect the following bamboo scaffolding and 75 associated structures (approximately 3.8 M x 4.6 M) according to the given drawing:
 - (i) a double-row scaffolding
 - (ii) a working platform
 - (iii) a cantilever

Remarks

- (1) Item 1 must be completed before item 2.
- (2) Candidate should not drop any tools /bamboos when working on scaffolding.

Duration: 6 hours (excluding lunch time)

Notes : (1) Candidate will be marked as fail if he does not carry out safety precautions during the test;

(2) The test paper consists of 4 pages. Total score is 100. Passing mark is 60.

Notes

- Every candidate is required to wear a safety belt / harness, together with suitable lanyard, attaching to an independent life line or secure anchorage and fittings, or a secure fixing point at all the times when working at heights.
- 2. All fastenings between bamboos should be tight and secure, bound up to 5 coils with tight knots.
- 3. Bamboos used as posts, bracings and the base ledgers should be "Mao Jue" (large bamboo), the rest of the members should be "Kao Jue" (normal bamboo).

4. Outer layer

- i. The distance between two adjacent posts should be 750 mm.
- ii. The distance between two ledgers should be 660 mm.
- iii. Posts should be 900 mm apart the wall.
- iv. Bracing should be erected at 45° - 60° from the horizontal level.
- v. One of the posts should be join to used, and with 3 joint-tying.

5. Inner layer


- i. The distance between two adjacent posts should be 750 mm.
- ii. The height of the lower lift transoms should be 1200mm from the ground.
- iii. The width of the working platforms should be 600mm.
- iv. The parallel ledgers should be 300mm apart the wall.
- v. The working platform on the scaffold should be closely planked, provided with suitable guardrails and toeboard.

6. Cantilever

- To be erected by using rakers, standards should not rest on the ground during erection.
- ii. Two projecting layers should be symmetrical.
- iii. Projection-ties should not be obstructive.
- iv. Transoms of the base platform should be 100mm apart.

Trade Test For Bamboo Scaffolder

Double-row with Cantilever Scaffold

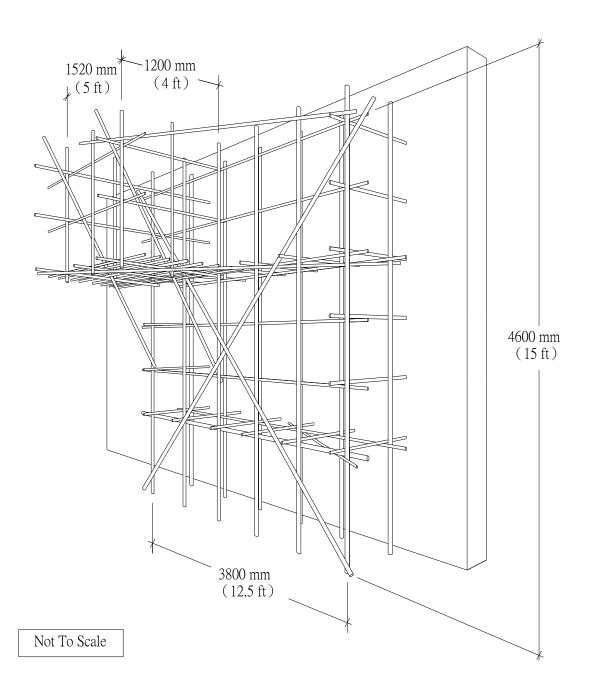

Notes to Candidates:

- Candidates should read the test papers carefully and ask the invigilator for any queries.
- 2. Candidates should study the drawings and specifications attached to test papers, if any, before the test begins.
- 3. Candidates should carry out the test according to test papers, working drawings and specifications provided.
- 4. Candidates shall bring their own safety shoes, other safety equipment will be provided by trade testing centre. Candidates must take all necessary safety precautions to ensure work safety.
- 5. All tools and materials required by the test will be provided by trade testing centre, candidates should check and ensure their adequacy and quality. Candidates shall use the tools and materials properly based on trade practice. All the tools must be returned to trade testing centre after the test. The candidates may ask the invigilator for any problems.
- 6. Candidates are required to handle and move the tools and materials for use in the test, and to carry out associated works.
- 7. Invigilator will take record photos periodically during the test.
- 8. Candidates are not allowed to take any photo or video with cameras or mobile phones.
- 9. Candidates are not allowed to use their mobile phones during the trade tests, except for emergency situation.
- 10. The marking scheme is based on the following criteria:

- a) Understanding of drawing and specification
- b) Preparation works before commencement of test
- c) Working procedures
- d) Accuracy and quality of works
- e) Progress of works
- f) Proper handling and use of materials
- g) Proper use of tools and equipment
- h) Safety precautions
- i) Considerate of other trades
- h) Housekeeping after completion of test
- 11. All candidates must stop when time is up.
- 12. Candidates are required to return the test paper to invigilator after the test.
- 13. Offering bribe to invigilator is an offence in law and trade testing centre will report to the ICAC for any such case.

In the event that the candidate fails to take any necessary safety precautions and / or works in any dangerous situations, he / she will be assessed failed