


SAFETY MEASURES TRUSS-OUT BAMBOO SCAFFOLDING WORK

Use designated form to notify the Labour Department before erecting the truss-out bamboo scaffolds.



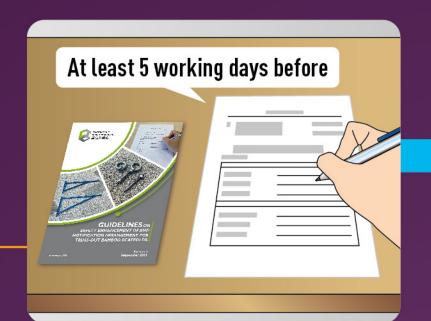


Check the validity of the green card and trade test certificate before work starts.



Engage a Registered Professional Engineer or a competent person (ACCP)*1 recognised by OSHC*2 to inspect and test the cast-in-anchors for truss-out bamboo scaffolds.

Fence off the areas underneath and adjacent to the work location.

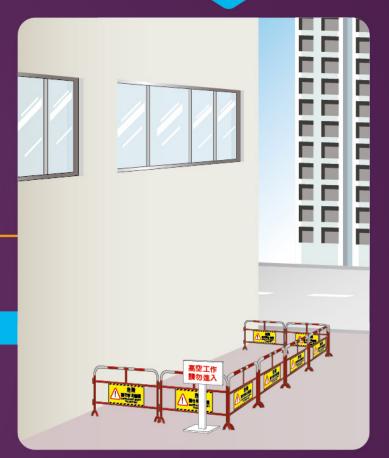



Or engage a person who has completed the designated course (DOCC)*3 organised by OSHC to install and inspect the transportable temporary anchorage devices (TTAD).



Use proper personal protective equipment including safety harness which should be attached to the anchor point or independent lifeline.



Remove the tarpaulin and load on the scaffolds when it is safe to do so before the inclement weather.

Engage a competent person to inspect the truss-out bamboo scaffolds and issue Form 5.



- *1 ACCP Competent Person for the Selection, Installation, Use, Inspection and Testing of Anchor Devices and Cast-in Anchors for Attachment of Personal Fall Protection Equipment for Truss-out Bamboo Scaffolds
- *2 OSHC Occupational Safety and Health Council
- *3 DOCC Certificate Course in Safety at Work for Repair, Maintenance, Alteration and Addition Works

LIFE FIRST SAY NO TO DANGER



Disclaimer

Whilst reasonable efforts have been made to ensure the accuracy of the information contained in this publication, the CIC nevertheless would encourage readers to seek appropriate independent advice from their professional advisers where possible and readers should not treat or rely on this publication as a substitute for such professional advice for taking any relevant actions.

© 2022 Construction Industry Council

Labour Department Online
Occupational Safety and Health
Complaint Platform







Address : 38/F, COS Centre 56 Tsun Yip Street, Kwun Tong, Kowloon

Tel: (852) 2100 9000 Fax: (852) 2100 9090 Email: enquiry@cic.hk