



WORKER STRUCK TO DEATH IN TSEUNG KWAN O

An accident happened in Tseung Kwan O on 26 May 2022, in which a worker was suspected to have been struck by a collapsed metal platform. He was later certified dead in the hospital.

The Construction Industry Council (CIC) would like to deliver this safety message for your attention. It would be much appreciated if you could distribute the message below to your fellow members, relevant personnel or other industry stakeholders where appropriate. Thank you very much.

Common Accidents



1. Not following proper sequence of dismantling.
2. No risk assessment was conducted in the field to identify the relevant potential risks.
3. Allow untrained worker to carry out dismantling works.
4. No competent person directly supervises dismantling.
5. Not using auxiliary equipment to support object to be dismantled.

Critical Control Measures

1. Identify risks, properly plan the procedures, establish system of work and ensure measures were implemented.
2. Provide substantive support to the structure to be dismantled.
3. Fence off the area for the work.
4. Conducted the dismantling work by trained personnel.
5. Supervise the dismantling work directly by a competent person.

Video Information

Video Link:
<https://www.youtube.com/watch?v=mUyh-1iNV8M>

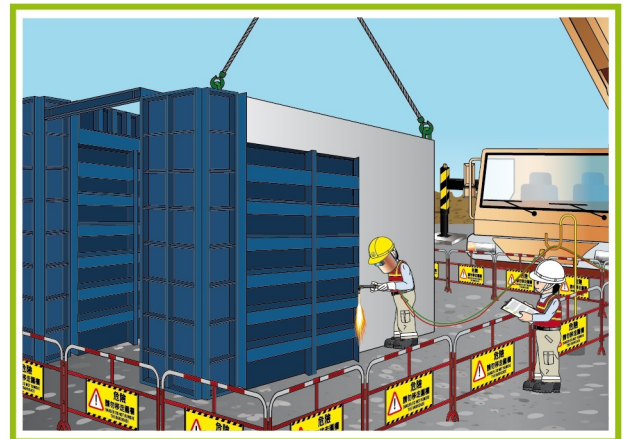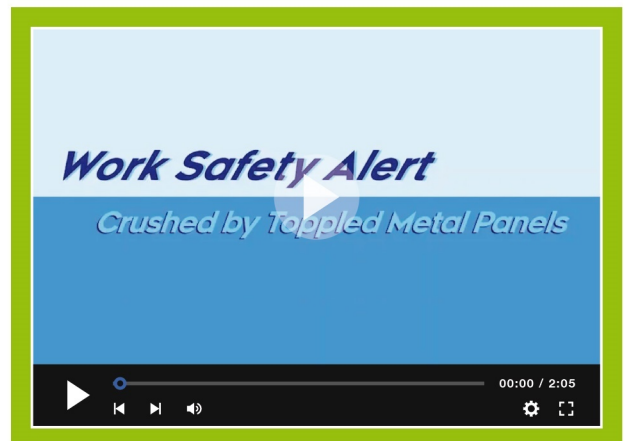



CONSTRUCTION
INDUSTRY COUNCIL
建造業議會

CIC Safety Message No. 009 / 22




ELIMINATE RISKS BY SAFE DESIGN

What if we could eliminate the high-risk task?

Reference information for sharing

Modular Integrated Construction Webpage

Mi Lift related presentation

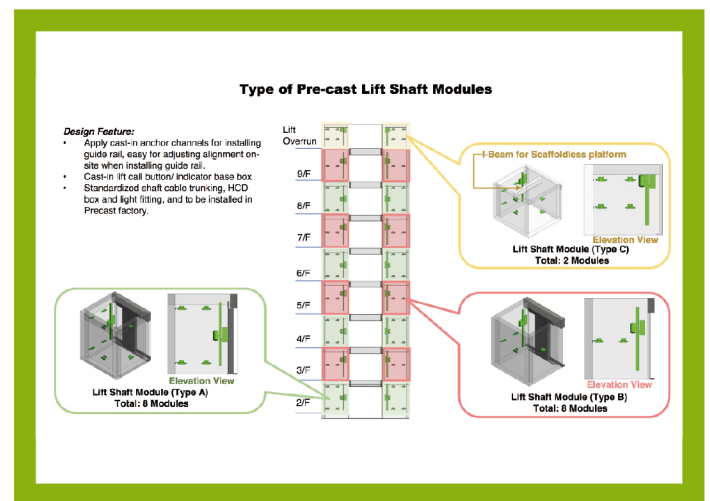

Safety Quiz
(Limited prize quotas, first come first served) :

[Join Now](#)



Disclaimer

This message is not intended to constitute any professional advice on these or any other subjects. The CIC (including its members and employees) will not accept responsibility for any consequences resulting from the use of or failure to use this message. For enquiries, please contact 2100 9000.